

Designed to meet ADA standards, Kolo Duo ADA creates an inclusive, user-friendly space for all users.



Top Acoustic Rating

ISO 2335-1 (2020) : Class B
ISO 717-1 (2020) : - 29 db
ASTM E596-96(2016) : - 28 db



Personalised Lighting

Adjustable LED light brightness and temperature with automatic motion detector. The LED lights are dimmable from 1800 lumens and the colour temperature can be controlled in the range of 2700 to 6500K.



Sustainable Interior

Eco-innovative Polyester (PET) Acoustics Panels installed in all Kolo models. SCS Global Services Recycled Content Certified PET interior uses a minimum 75% post-consumer recycled polyester staple fibre content.




Automatic Door

Kolo Duo ADA booth is equipped with power-assisted door that swings open with a light pull on the handle and closes automatically after 15 seconds. (for default setting)



Accessible Entrance

Accessibility meets ease and comfort—the entrance features a floor height of just 1cm with ramp access.



Wide Opening

The door opening is 25% larger in width than the standard Kolo Duo, offering an effortless entry and exit for any user.

Specifications

Adjustable Lighting

PIR (Passive Infrared) sensor activated LED lighting, dimmable up to 1800 lumens with adjustable colour temperature (2700K-6500K)
FCC and DLC certified, cULus listed

Power-Assisted Door

UL certified, power assisted opening for convenience or for less able users; opens with a light pull on the handle and closes automatically after 15 seconds

Laminated Glass

4mm + 0.76mm + 4mm Laminated Glass with Clear PVB Interlayer

Acoustic Foam

The interior is fully lined with REACH and RoHS-compliant acoustic foam for effective noise reduction

ADA Set

Flip Desk + 2 Flip Benches, a must-have add-on set for a seamless experience

Door Hinge

The multi-functional door hinge features weight support for smooth opening and closing. It can lock at 90° or auto-close to prevent collisions with walls or surroundings



Ventilation

Kolo Duo ADA
4 fans / Airflow: 167 CFM (284 m³/h)

Cable Management

(*Unplug power before removal)

Electric cables are hidden in compartments to connect and route external digital devices

Charging Station

2 AC outlets, 1 USB-A & 1 USB-C chargers, 1 LAN port (RJ45)
UL and CE certified
Input : 110 - 240 VAC, 10.1 A, 50 - 60Hz
Output : DC 5V, 2.1A

Recycled PET Fabric


The booth interior features SCS Global Services Recycled Content Certified PET acoustic panels, composed of at least 75% post-consumer recycled polyester staple fiber

Ramp Access

Features a floor height of just 1 cm

Dimensions & Placement Guide

unit:mm

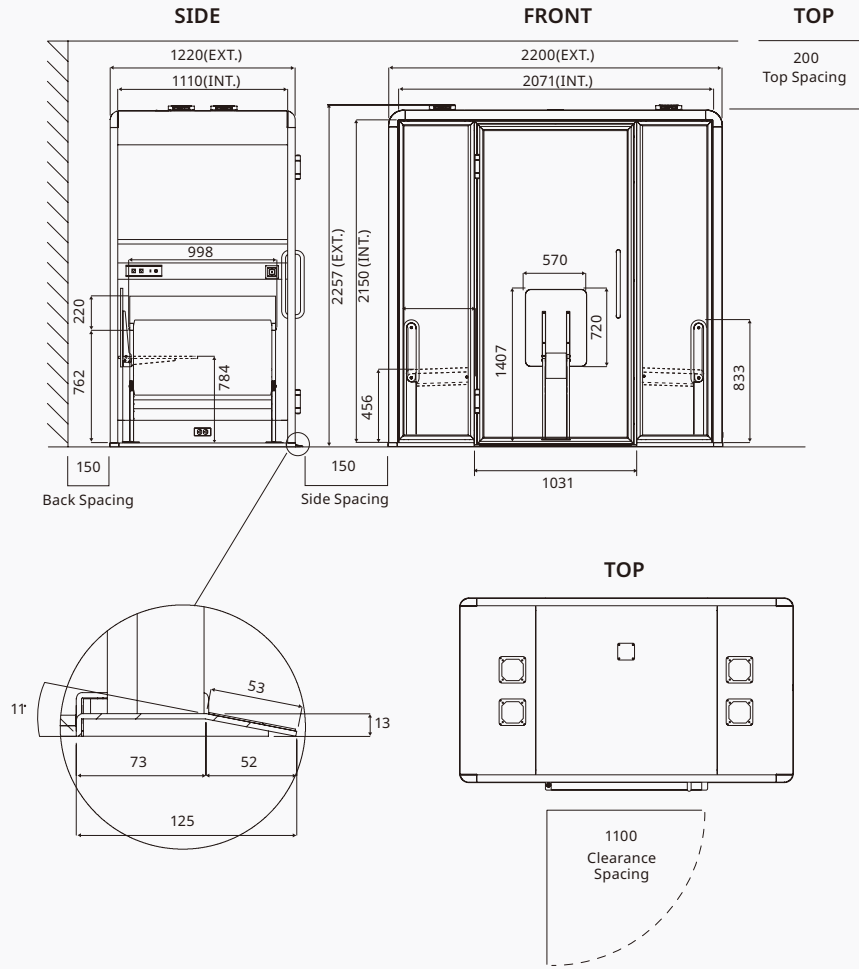

Swatches

Frame finish is limited to matching black or white for black or white exteriors.
 For all other exterior colours, the frame is available in black, white, or a matching colour.

Door



White



Black

Frame & Exterior



White



Graphite
Grey



Black



Dusty Rose



Bright Red



Brick Red



Cappuccino



Yellow



Forest Green



Light Blue



Navy Blue



Purple

PET Interior



Blended
White



Light Grey



Dark Grey



Burgundy



Taupe



Green



Blue

Tabletop



White



Black

Gabriel Medley Fabric



Slate Grey



Mocha
Brown



Mustard
Yellow



Scarlet Red



Fuchsia
Purple



Indigo Blue



Sky Teal



Matcha
Green