

Milli Stand

single booth

A purpose-built standing acoustic booth, designed for quick, private conversations or short, exclusive personal sessions.




Acoustic Solution

ISO 23351-1 (2020) Class B
ISO 717-1(2020) : - 28 db
ASTM E596-96(2016) : - 27 db




Automatic Lighting

Milli features a motion sensor that turns on the booth lighting upon entry, providing a smooth transition experience between different spaces. The light then automatically turns off when not in use to conserve energy.



Sustainable Interior

Eco-innovative Polyester (PET) Acoustics Panels installed in all Milli series. SCS Global Services Recycled Content Certified PET interior uses a minimum 75% post-consumer recycled polyester staple fibre content. A Milli Stand booth PET interior is made from 272 recycled 500ml bottles.



Move with Ease

Milli booths are equipped with levelling feet that can be adjusted to access the rollers for horizontal movement. This feature provides the flexibility to move the booth easily in a workspace when needed.

Specifications

Automatic Lighting

LED lighting with a PIR (Passive Infrared) sensor, automatically switching off when not in use for energy savings.
Ceiling Light: Colour temperature 3000K, 782 lumens

FCC and DLC (DesignLights Consortium®) certified, cULus listed.

Acoustic Foam

The interior is fully lined with REACH and RoHS-compliant acoustic foam for effective noise reduction.

Laminated Glass

4mm + 0.76mm + 4mm Laminated Glass with Clear PVB Interlayer.

Seismic Kit

Seismic plates and bolts are optional upon request.



Ventilation

Ventilation is PIR-activated and switches off automatically after 5 minutes of inactivity.

Milli Stand: 2 fans & 1 natural vent / Airflow: 84 CFM (143 m³/h)

Milli Fornt Light

Colour temperature: 4000K / Brightness: 800 lumens
Power consumption: 8W

Tested and certified according to IEC 60598 standard and RoHS

Charging Station

2 AC outlets, 1 USB-A & 1 USB-C chargers, 1 LAN port (RJ45)
UL and CE certified
Input : 110 - 240 VAC, 10.1 A, 50 - 60 Hz
Output : DC 5V, 2.1A

Door Orientation


The standard door orientation is right handed, but can be modified for left-handed configuration.

Recycled PET Fabric

The booth interior features SCS Global Services Recycled Content Certified PET acoustic panels, composed of at least 75% post-consumer recycled polyester staple fiber. These panels provide excellent soundproofing and comply with fire and safety regulations.

Dimensions & Placement Guide

unit:mm

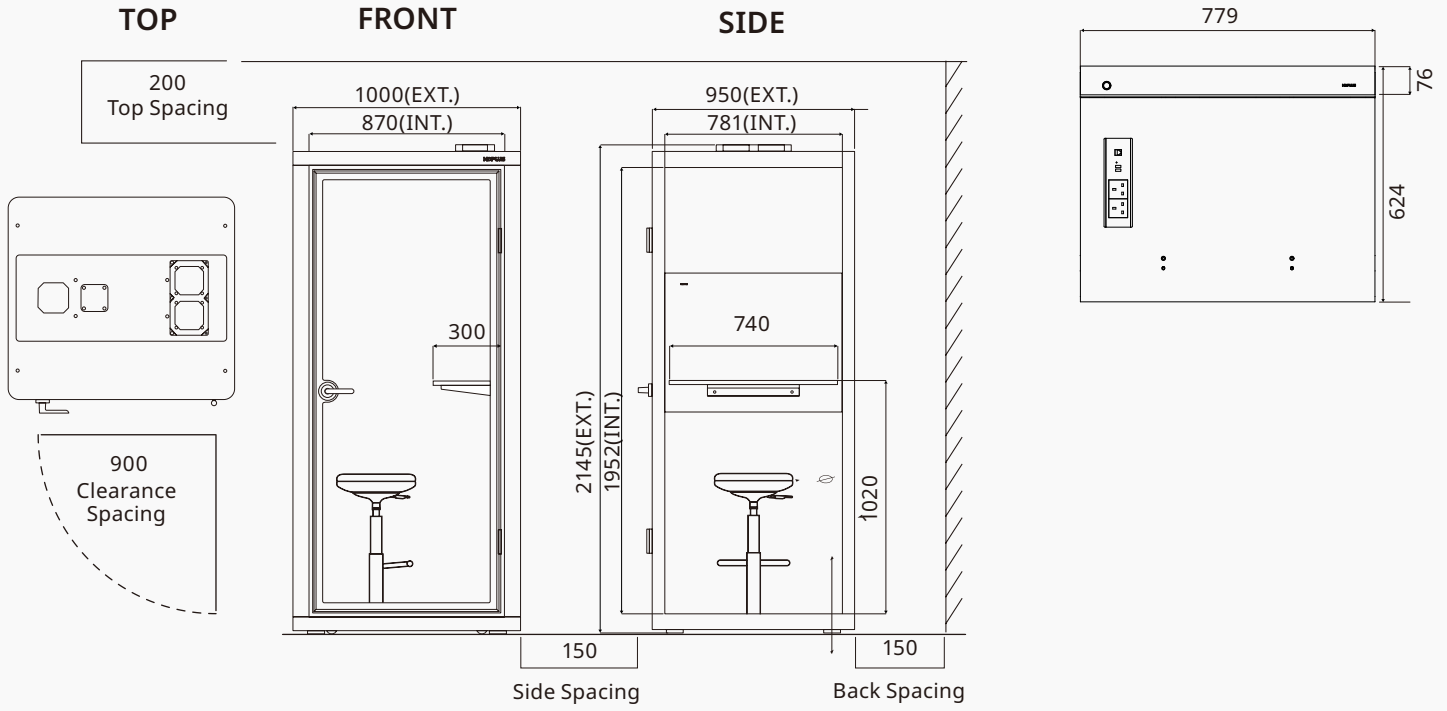

Swatches

PET Interior



Light Grey Dark Grey

Exterior



White Graphite Grey Black Dusty Rose Bright Red Brick Red



Cappuccino Yellow Forest Green Light Blue Navy Blue Purple

Tabletop



White Black